



# **College Of Computer Science Network**

**NET 432**

**LAB 2**

**Quality of service: Queuing  
2012**

## Quality of service: Queuing

### Order of Packet Transmission and Dropping

#### Objective

The objective of this lab is to examine the effect of different queuing disciplines on packet delivery and delay for different services.

#### Overview

As part of the resource allocation mechanisms, each router must implement some queuing discipline that governs how packets are buffered before transmitting. Various queuing disciplines can be used to control which packets get transmitted (bandwidth allocation) and which packets get dropped (buffer space). The queuing discipline also affects the latency experienced by a packet, by determining how long a packet waits to be transmitted. Examples of the common queuing disciplines are first-in first- out (**FIFO**) queuing, priority queuing (**PQ**), and weighted-fair queuing (**WFQ**).

The idea of FIFO queuing is that the first packet that arrives at a router is the first packet to be transmitted. Given that the amount of buffer space at each router is finite, if a packet arrives and the queue (buffer space) is full, then the router discards (drops) that packet. This is done without regard to which flow the packet belongs to or how important the packet is.

PQ is a simple variation of the basic FIFO queuing. The idea is to mark each packet with a priority; the mark could be carried, for example, in the IP Type of Service (ToS) field. The routers then implement multiple FIFO queues, one for each priority class. Within each priority, packets are still managed in a FIFO manner. This queuing discipline allows high priority packets to cut to the front of the line.


The idea of the fair queuing (FQ) discipline is to maintain a separate queue for each flow currently being handled by the router. The router then services these queues in a round robin manner. WFQ allows a weight to be assigned to each flow (queue). This weight effectively controls the percentage of the link's bandwidth each flow will get. We could use ToS bits in the IP header to identify that weight.

In this lab you will set up a network that carries three applications: FTP, Video, and VoIP. You will study how the choice of the queuing discipline in the routers can affect the performance of the applications and the utilization of the network resources.

## Procedure


### Open an Existing Project

1. Select **Model Files** from **file menu** and click **Add Model Directory**
2. Select **LAB3 QoS** file from the Desktop directory ⇒ Click **OK** then click **Include subdirectory**
3. Select **open** from **file menu** ⇒ Select **\_Qos\_queuing project**

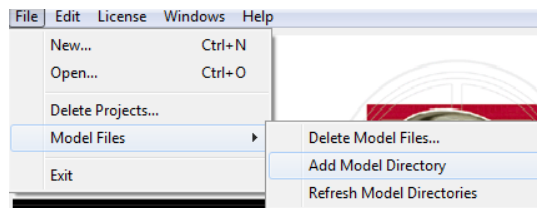

**Application Config** is used to specify applications that will be used to configure users profiles.

The following Network will appear in the project workspace

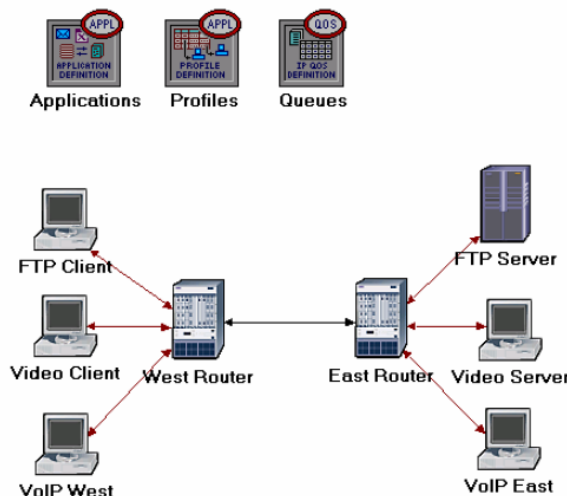

**Profile Config** describes the activity patterns of a user or group of users in terms of the applications used over a period of time. You must define the applications using the **Application Config** object before using this object.


4. Save the project using **<your initials>\_ Qos\_queuing**

### Configure the Applications:

1. Right-click on the **Applications** node ⇒ **Edit Attributes** ⇒ Expand the **Application Definitions** hierarchy ⇒ Set **rows** from **2** to **3**
2. Go to the last row Name and write: **VoIP Application**

The **QoS Attribute Config** node defines attribute configuration details for protocols supported at the IP layer. These specifications can be referenced by the individual nodes using symbolic names. It defines different queuing profiles such as FIFO, WFQ, priority queuing, custom queuing, MRRR, MDRR, and DWRR


- Expand the **Description** hierarchy ⇒ Assign **PCM Quality Speech** to **Voice**. If you edit it, you can see that the ToS assigned to it is **Interactive Voice (6)** then Click **OK**

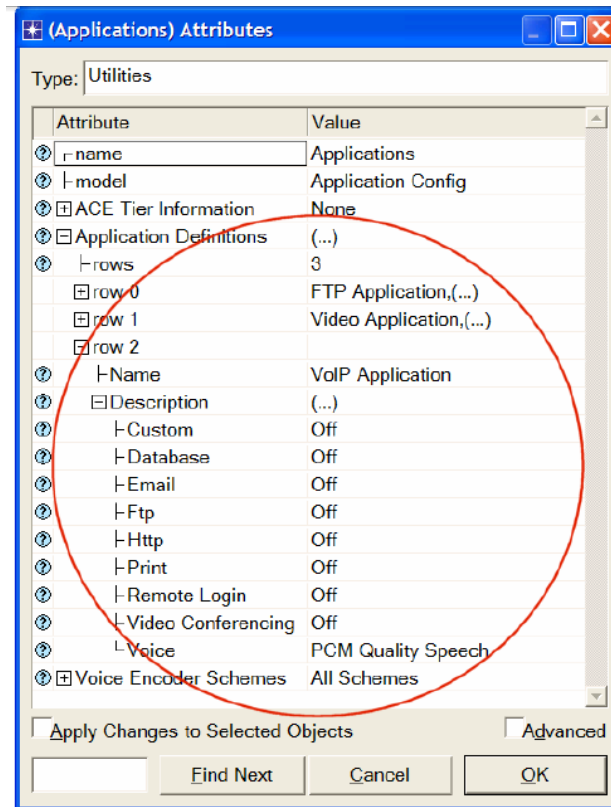

**Type of Service (ToS)** is assigned to the IP packets. It represents a session attribute that allows packets to be provided the appropriate service in the IP queues. **Best-effort** delivery means that delivery of a packet is attempted but is not guaranteed.

### Configure the Profiles:

- Right-click on the **Profiles** node ⇒ **Edit Attributes** ⇒ Expand the **Profile Configuration** hierarchy ⇒ Set **rows** to 3.
- Name and set the attributes of row 2 as shown:
- Click **OK** and then save your project.

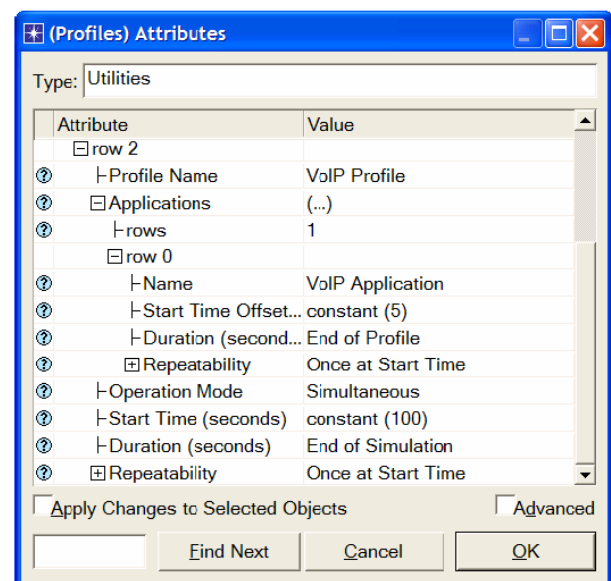

### ***Configure the Queues:***


We will keep the default queuing profiles that are defined in our Queues object. It is recommended that you check out the configuration of the FIFO, PQ, and WFQ profiles.

### ***Configure the Workstations and Servers:***

1. Right-click on the **FTP Client** ⇒ **Edit Attributes** ⇒ Expand the **Application: Supported Profiles** hierarchy ⇒ Set **rows** to **1** ⇒ Set **Profile Name** to **FTP Profile** ⇒ Click **OK**.
2. Right-click on the **Video Client** ⇒ **Edit Attributes** ⇒ Expand the **Application: Supported Profiles** hierarchy ⇒ Set **rows** to **1** ⇒ Set **Profile Name** to **Video Profile** ⇒ Click **OK**.
3. Right-click on the **VoIP West** ⇒ **Edit Attributes**.
  - i. Expand the **Application: Supported Profiles** hierarchy ⇒ Set **rows** to **1** ⇒ Set **Profile Name** to **VoIP Profile**.
  - ii. Edit the **Application: Supported Services** value ⇒ Set **rows** to **1** ⇒ Set **Service Name** to **VoIP Application** ⇒ Click **OK** twice.
4. Right-click on the **VoIP East** ⇒ **Edit Attributes**.
  - i. Expand the **Application: Supported Profiles** hierarchy ⇒ Set **rows** to **1** ⇒ Set **Profile Name** to **VoIP Profile**.
  - ii. Edit the **Application: Supported Services** value ⇒ Set **rows** to **1** ⇒ Set **Service Name** to **VoIP Application** ⇒ Click **OK** twice.
5. Right-click on the **FTP Server** ⇒ **Edit Attributes** ⇒ Edit the **Application: Supported Services** value ⇒ Set **rows** to **1** ⇒ Set **Service Name** to **FTP Application** ⇒ Click **OK** twice.
6. Right-click on the **Video Server** ⇒ **Edit Attributes** ⇒ Edit the **Application: Supported Services** value ⇒ Set **rows** to **1** ⇒ Set **Service Name** to **Video Application** ⇒ Click **OK** twice.
7. Save your project.

### **Configure the Routers:**

1. Click on the link connecting the **East** and **West** routers to select it ⇒ From the **Protocols**, menu choose **IP** → **QoS** → **Configure QoS**.
2. Make sure the selected items are as shown in the following *QoS Configuration* dialog box ⇒ Click **OK**.

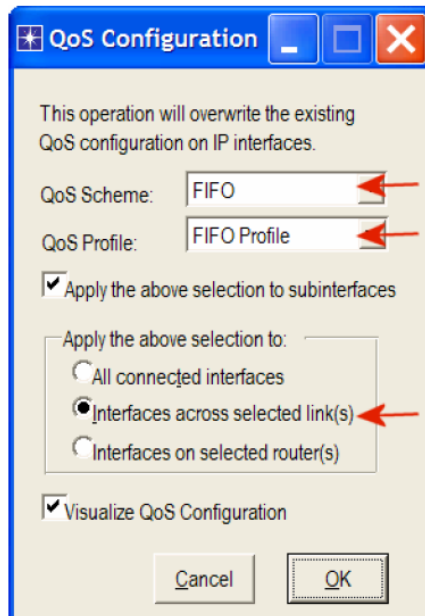

*Note:* Since the **Visualize QoS Configuration** radio button is checked, the link is colored based on the QoS scheme used (blue for FIFO).

3. Save your project.

### **Choose the Statistics**

To test the performance of the applications defined in the network, we will collect one of the many available statistics as follows:

1. Right-click anywhere in the project workspace and select **Choose Individual Statistics** from the pop-up menu.
2. In the *Choose Results* dialog box, select the following global statistic:

**Global Statistics → IP → Traffic dropped (packets/ sec)**

**Global Statistics → Video Conferencing → Traffic Received (bytes/ sec)**


**Global Statistics → Voice → Packet Delay Variation**

**→ Packet End-to-End Delay (sec)**

**→ Traffic Received (bytes/ sec)**

## Configure the Simulation

Here we need to configure the duration of the simulation:


1. Click on  and the *Configure Simulation* window should appear.
2. Set the duration to be **150 seconds**.
3. Click **OK** and then save your project.

## Duplicate the Scenario

In the network we just created, we used the FIFO queuing discipline in the routers. To analyze the effect of different queuing disciplines, we will create two more scenarios to test the PQ and WFQ disciplines.

A. Select **Duplicate Scenario** from the **Scenarios** menu and give it the name **PQ** ⇒ Click **OK**.

1. Click on the link connecting the **East** and **West** routers to select it ⇒ From the **Protocols** menu choose **IP** → **QoS** → **Configure QoS**.
2. Make sure the selected items are as shown in the following *QoS Configuration* dialog box ⇒ Click **OK**.

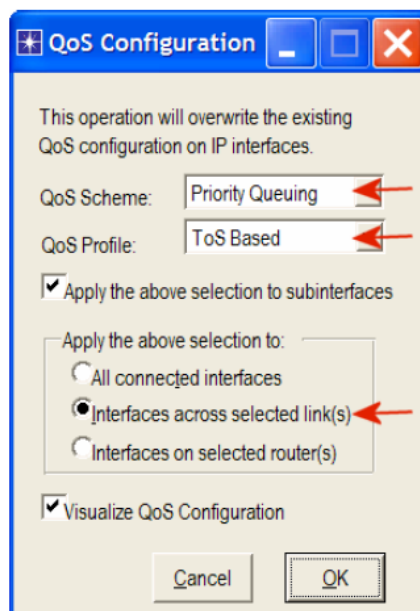


*Note:* Since the **Visualize QoS Configuration** radio button is checked, the link is colored based on the QoS scheme used (orange for priority queuing).

3. Save your project.

B. Select **Duplicate Scenario** from the **Scenarios** menu and give it the name **WFQ**  
⇒ Click **OK**.

1. Click on the link connecting the **East** and **West** routers to select it ⇒ From the **Protocols** menu choose **IP** → **QoS** → **Configure QoS**.
2. Make sure the selected items are as shown in the following *QoS Configuration* dialog box ⇒ Click **OK**.

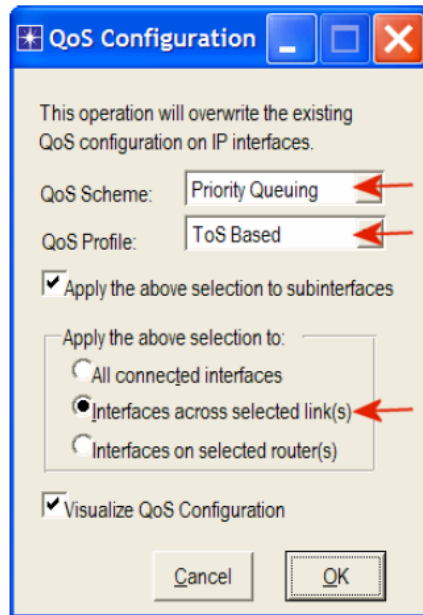


Note: Since the **Visualize QoS Configuration** radio button is checked, the link is colored based on the QoS scheme used (orange for priority queuing).

3. Save your project.

### **Run the Simulation**

To run the simulation for the three scenarios simultaneously:

1. Go to the **Scenarios** menu ⇒ Select **Manage Scenarios**.
2. Change the values under the **Results** column to **<collect>** (or **<recollect>**) for the three scenarios. Compare to the following figure.

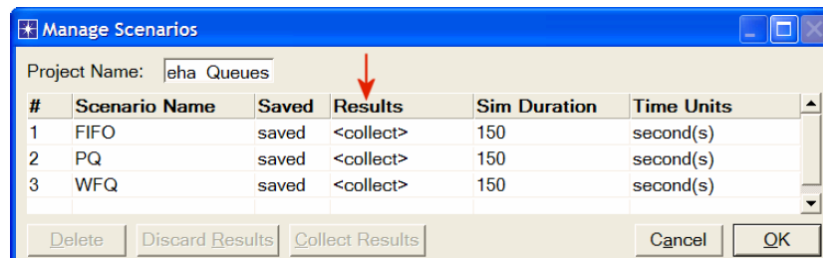




3. Click **OK** to run the three simulations. Depending on the speed of your processor, this may take several minutes to complete.
4. After the simulation completes the three runs, one for each scenario, click **Close**.
5. Save your project.


**Note:** Actual results will vary slightly based on the actual node positioning in the project.

### ***View the Results***



To view and analyze the results:

1. Select **Compare Results** from the **Results** menu.
2. Select the IP **Traffic Dropped** statistic and click **Show**. The resulting graph should resemble the one below. **Note:** The shown graph is the result of zooming into the region of interest on the original graph.
3. Create the graph for **Video Conferencing Traffic Received**
4. Create the graph for **Voice Traffic Received**

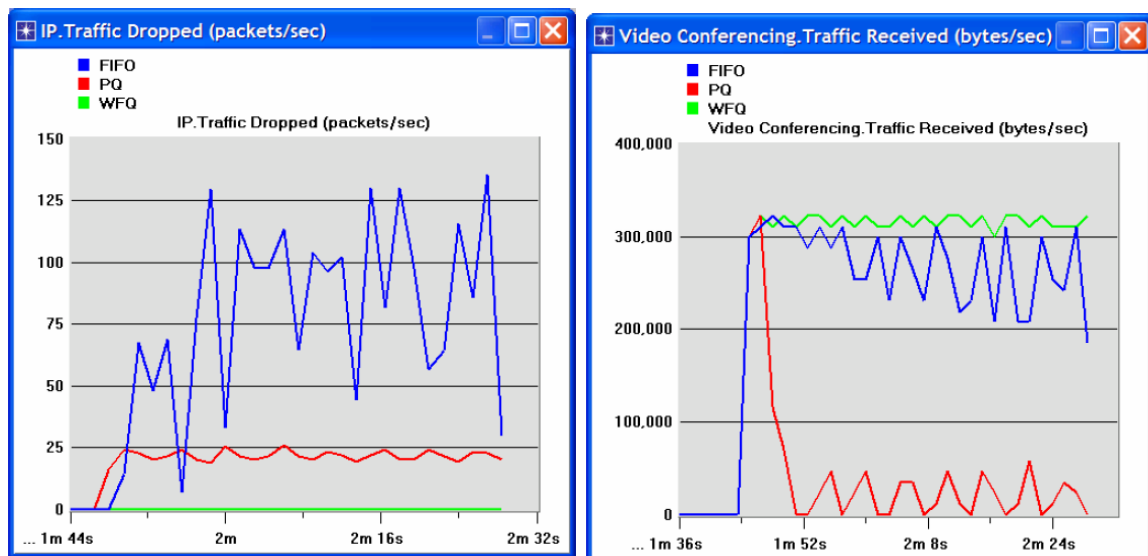

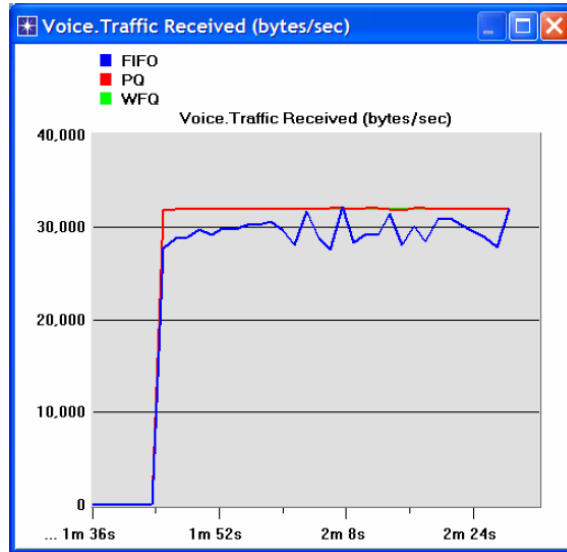

Create graphs for **Voice Packet End-to-End Delay** and **Voice Packet Delay Variation**: (Note: the trace for **WFQ** is not shown on the following graphs because it is overlapped by the trace of **PQ**.)

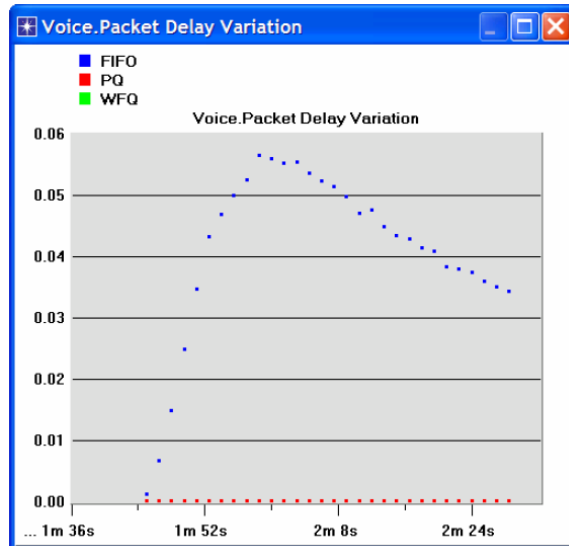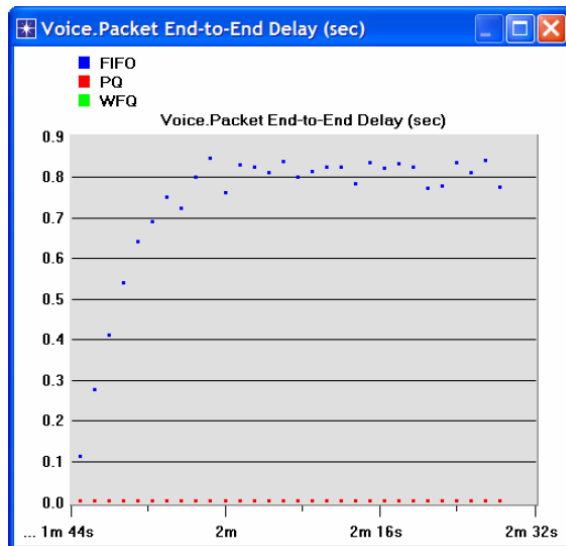

## Questions

- 1) Analyze the graphs (All) we obtained and verify the overlap of the **Voice Packet End-to- End Delay** and **Voice Packet Delay Variation** graphs. Compare the three queuing disciplines and explain their effect on the performance of the three applications.
- 2) In the implemented project, edit the **Queues** object and check the profiles assigned to the **FIFO**, **PQ**, and **WFQ** disciplines. For each profile answer the following questions:
  - a. How many queues are associated with each discipline?
  - b. In this lab, we used **ToS** to identify the priority and weight for the **PQ** and **WFQ** disciplines respectively. What are the other parameters that can be used to identify the priority and weight?
  - c. In **PQ**, how are queues configured to serve different ToS values?
  - d. In **WFQ**, how are queues configured to serve different ToS values?
- 3) For all scenarios, choose the “**queuing delay <--**” statistic for the link that connects **East Router** and **West Router**. Rerun the simulation and generate the graph that compares that queuing delay for all queuing disciplines (scenarios). Analyze this graph.

*Hint:* The “**queuing delay <--**” statistic is under the point-to-point hierarchy.

## Further Readings

The Differentiated Services Field: IETF RFC number 2474 ([www.ietf.org/rfc.html](http://www.ietf.org/rfc.html)).

## Lab Report

Prepare a report that follows the guidelines explained in Lab 0. The report should include the answers to the above questions as well as the graphs you generated from the simulation scenarios. Discuss the results you obtained and compare these results with your expectations. Mention any anomalies or unexplained behaviors.